GREENMAX™
INTCO RECYCLING

GREENMAX™ COMPACTOR POSEIDON C200





> Screw Compression Technology enables continuous output at a ratio of 8:1, high density and security, low utility consumption.

PHOENIX CONTACT NSK SIEMENS Schneider Electric

> Reputable & High quality components make the machine reliable and durable



> Water draining function squeezes out the liquid to the water collection tray.



> Water collection tray is made of acid-resistant stainless steel to withstand the low PH in many liquids.



> SIEMENS control system guarantees easy and simple operation.

CE SA UL


> CE approved and comply with UL/CSA standards

> APPLICABLE MATERIAL:

	PET BOTTLES	ALUMINUM CANS	PE/PP FILM	BEVERAGE CARTONS	YOGURT CUPS
MATERIAL					
FEED IN/ HOUR	7000pcs/0.5L 3000pcs/1.5L 2300pcs/2.0L 1700pcs/2.5L	7000pcs/0.33L	----	4500pcs/0.25L	12000pcs/0.1L
OUTPUT/ HOUR	appr. 200kg 440 lbs	appr. 200kg 440 lbs	appr. 400-450kg 880-990 lbs	appr. 200kg 440 lbs	appr. 120kg 260 lbs

GREENMAX™
INTCO RECYCLING

> DIMENSIONS

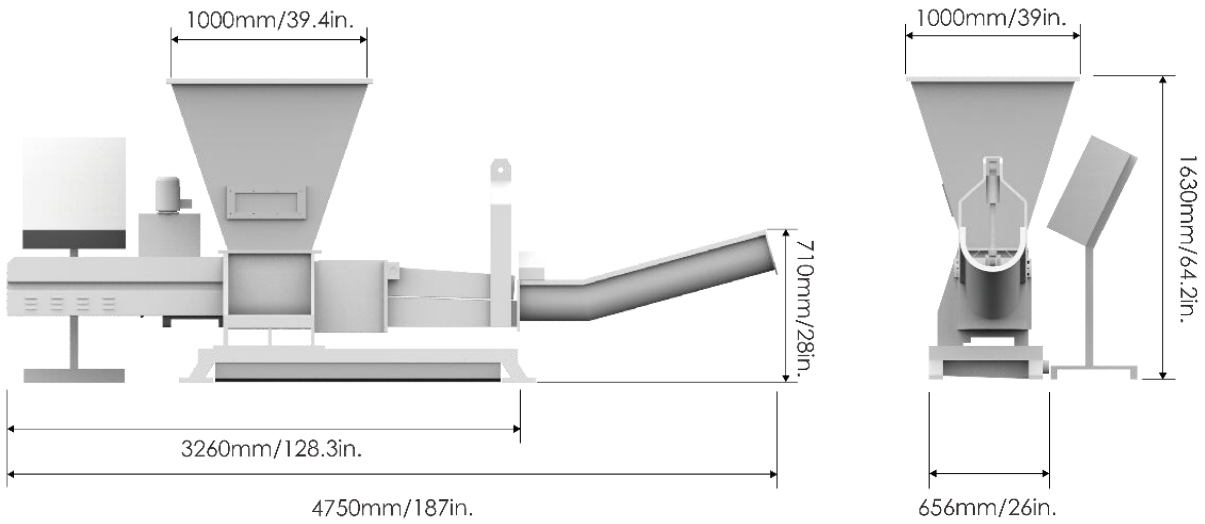

> TECHNICAL DATA

ITEM	P-C200
Total Power Consumption	15.55kw / 20.9hp
Screw Rotation Speed	30rad / min
Screw Reduction ratio	50:1
Bottle Volume Reduction	10:1
Compressed PET Density	250 kg/m3 / 510 lbs/cubic yard
Feed Hopper Dimension	1000*1000（l/w）mm/ 39.4*39.4（l/w）in.
Dimensions	4750*1000*1630(l/w/h) mm / 187.0*39.4*66.9(l/w/h) in.
Shipping Dimensions	Main part: 3660*1390*1850(l/w/h) mm / 144.1*54.7*72.8(l/w/h) in.
Weight	2000kg / 4409lbs