GREENMAX®
INTCO RECYCLING

TOTAL SOLUTION TO
EPS/STYROFOAM RECYCLING

GREENMAX TRITON SERIES WASHING LINE


CUSTOMIZED DESIGN

Capacity Range:

200-500kg/h



>ADVANTAGES OF TRITON SERIES



>High efficiency, intelligence, and simple operation



>Personalized customization and reasonable layout



>Online guidance, and brand after-sales



>Ultra-low energy consumption, energy conservation, and environmental protection



>Durable and easy to maintain



>The cleaning effect is excellent with advanced technology

NTCO RECYCLING +19095094388
WWW.INTCORECYCLING.COM

GREENMAX®
INTCO RECYCLING

TOTAL SOLUTION TO
EPS/STYROFOAM RECYCLING


>APPLICABLE MATERIALS:

Expanded Foam	EPS		T-EPS (Specifically for EPS)
	EPS FOOD TRAYS		T-EPS FOOD TRAYS (Specifically for EPS FOOD TRAYS)
Film Materials	PE Film		T-PE Film (Specifically for PE Film)
	PP Film		T-PP Film (Specifically for PP Film)
Rigid Plastic	HDPE		T-HDPE (Specifically for HDPE)
	PP		T-PP (Specifically for PP)

GREENMAX® INTCO RECYCLING

TOTAL SOLUTION TO EPS/STYROFOAM RECYCLING

>T-EPS

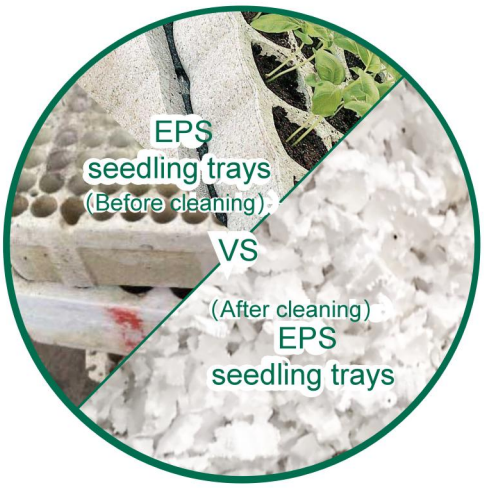





NTCO RECYCLING +19095094388

WWW.INTCORECYCLING.COM

>TECHNICAL DATA

1. T-EPS	Capacity 200~300kg/h
2. Conveyor	Motor Power 1.5kw
3. Crusher	Motor Power 2*4kw
4.Screw Loader Ⅰ	Motor Power 3kw
5.Cleaning Machine	Motor Power 2*3kw
6.Water Circulation System (optional)	Motor Power 2.2kw
7.Screw Loader Ⅱ	Motor Power 3kw
8. Dehydrator	Motor Power 22kw
9.Pipeline Dryer	Fan Power 4+7.5kw Heating power 36kw
10. Compactor	Motor Power 15.55kw